

The technology at a glance

DÜRR C SEPARATING SYSTEMS

C separating systems	CS 1 7117-70/-71 ¹	CAS 1 7117-20/-21 ¹	CA 1 7117-80/-81 ²
Voltage (V)	24	24	24
Frequency (Hz)	50 – 60	50 – 60	50 – 60
Electrical power (W)	60	60	60
Current consumption (A)	2.5	4.0	4.0
Max. rate of fluid flow (l/min)	2	4	4
Dimensions (H x W x D, cm)			
without housing	12.5 x 15 x 12	25.5 x 15,1 x 11	25.5 x 15,1 x 11
with housing	43.5 x 25.5 x 16	43.5 x 25.5 x 16	43.5 x 25.5 x 16
Weight			
without housing (kg)	1.4	2.7	2.7
with housing (kg)	7.4	8.7	8.7
Separation rate (%) ³	–	97.9	97.9
Test no.	–	Z64.1-20	Z64.1-20

¹ with/without rinsing unit

²-81: Special kit for installation behind VS 300 (S)


³ Separation rates measured by the TÜV [technical monitoring authority] Essen in accordance with the German standard test at maximum rate of fluid flow



CS 1, CAS 1 and CA 1 can be used externally in the practical housing.



Rinsing unit for producing a fine film of water that protects the separation machine from deposits.

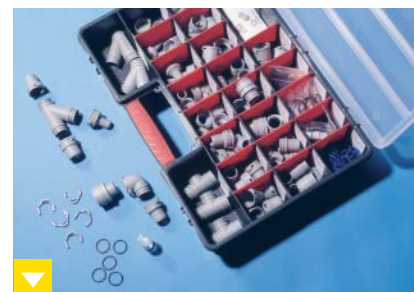

Carrying case for DürrConnect and Dürr-Connect Special.

Dürr Dental GmbH & Co. KG
Höpfigheimer Strasse 17
D-74321 Bietigheim-Bissingen

www.duerr.de
info@duerr.de

